







TSF-8040

All purpose material for integrated magnetics

Initial Permeability 3000 +/- 25%

Curie Temperature > 210 Celsius

Saturation Flux Density @ 15 Oersteds 5000 gauss

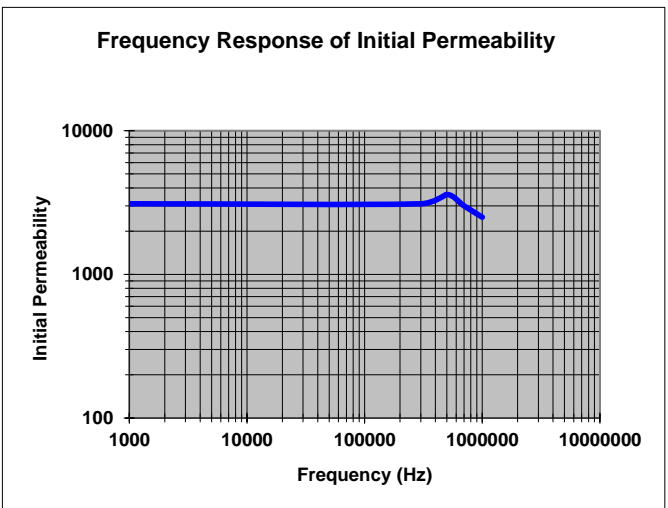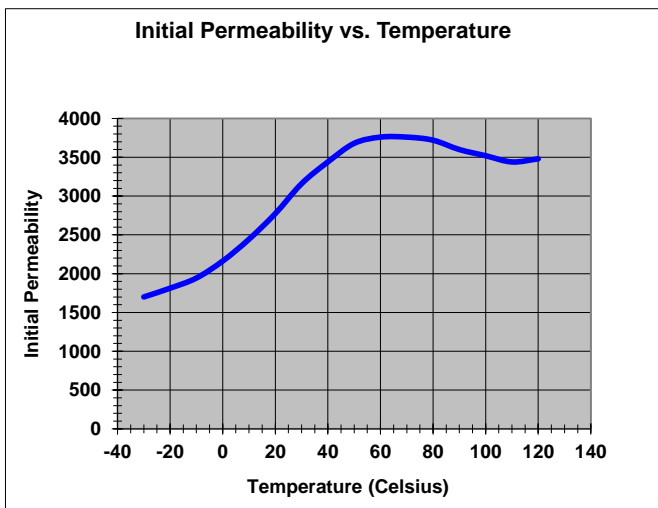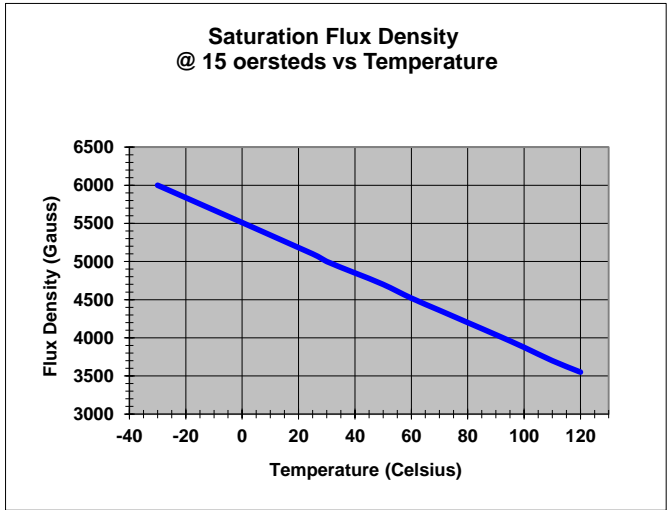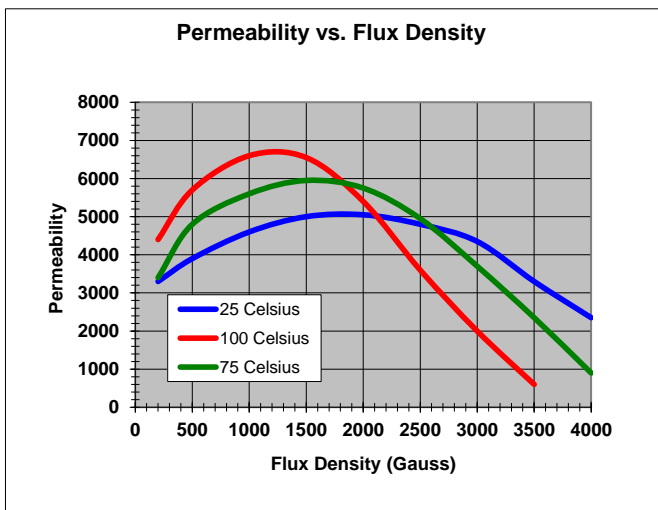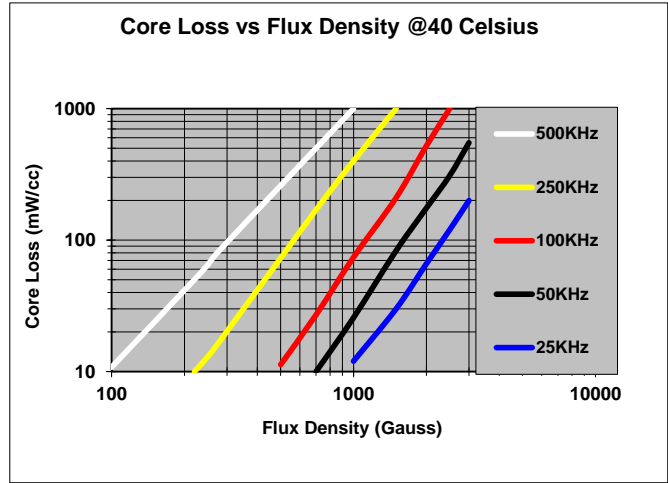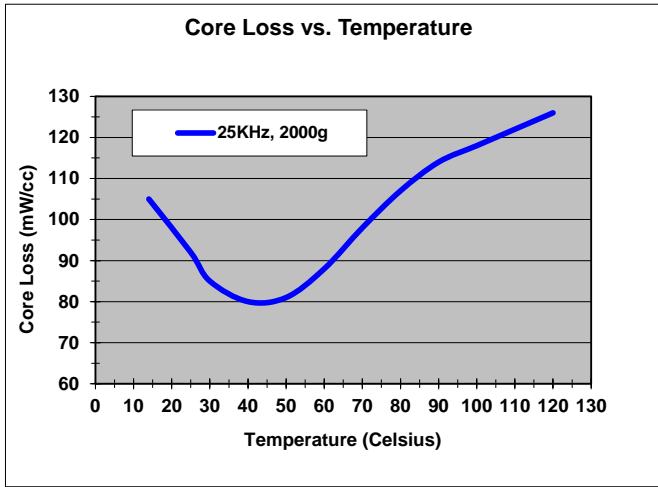

TSC FERRITE International 847-249-4900 or Fax 847-249-4988